

Linear LED modules 3-Row

A linear solution for premium class indoor lighting. Optimized for LEDiL's FLORENCE-3R-IP, FLORENCE2-3R optics.

Product description

- Long life-time
- Built-in, constant current LED module
- Re-workable push-in terminals enabling easy connection
- Compliance and approval: CE, ENEC
- Available CCT from 2700K to 6500K and CRI 70, 80, 90



LinLED CRI 80 CG G5

Product name	Ordering code	Colour temperature [K]	Current nominal If nom [mA]	Luminous flux ¹ φ [lm]	Useful luminous flux ² [lm]	Voltage ¹ Vf [V]	Power ¹ P [W]	Efficacy ¹ [lm/W]	Current minimum If min ³ [mA]	Current maximum If max [mA]	Energy Efficiency Class
LinLED 280x55mm 1100lm 830 3x11 33V CG G5	1010 137 01546	3000	190	1081	1109	29	5.6	193	30	900	C
LinLED 280x55mm 1100lm 840 3x11 33V CG G5	1010 137 01646	4000	190	1149	1180	29	5.6	205	30	900	B

LinLED CRI 80 Optimum G2

Product name	Ordering code	Colour temperature [K]	Current nominal If nom [mA]	Luminous flux ¹ φ [lm]	Useful luminous flux ² [lm]	Voltage ¹ Vf [V]	Power ¹ P [W]	Efficacy ¹ [lm/W]	Current minimum If min ³ [mA]	Current maximum If max [mA]	Energy Efficiency Class
LinLED 280x55mm 1100lm 830 3x11 33V Opt G2	1010 117 82246	3000	195	1090	1129	30	5.9	184	30	450	C
LinLED 280x55mm 1100lm 840 3x11 33V Opt G2	1010 117 82346	4000	195	1137	1178	30	5.9	192	30	450	C

LinLED CRI 90 Optimum G2

Product name	Ordering code	Colour temperature [K]	Current nominal If nom [mA]	Luminous flux ¹ φ [lm]	Useful luminous flux ² [lm]	Voltage ¹ Vf [V]	Power ¹ P [W]	Efficacy ¹ [lm/W]	Current minimum If min ³ [mA]	Current maximum If max [mA]	Energy Efficiency Class
LinLED 280x55mm 1100lm 927 3x11 33V Opt G2	1010 127 08446	2700	225	1032	1069	31	6.9	150	30	450	D
LinLED 280x55mm 1100lm 930 3x11 33V Opt G2	1010 127 08546	3000	225	1068	1107	31	6.9	156	30	450	D
LinLED 280x55mm 1100lm 940 3x11 33V Opt G2	1010 127 08646	4000	225	1141	1182	31	6.9	166	30	450	D

LinLED CRI 80 Optimum G1

Product name	Ordering code	Colour temperature [K]	Current nominal If nom [mA]	Luminous flux ¹ φ [lm]	Useful luminous flux ² [lm]	Voltage ¹ Vf [V]	Power ¹ P [W]	Efficacy ¹ [lm/W]	Current minimum If min ³ [mA]	Current maximum If max [mA]	Energy Efficiency Class
LinLED 280x55mm 2000lm 830 3x11 33V Opt G1	1010 117 54846	3000	350	1890	1928	31	11	172	30	1050	C
LinLED 280x55mm 2000lm 840 3x11 33V Opt G1	1010 117 54946	4000	350	2001	2041	31	11	182	30	1050	C

LinLED CRI 90 Optimum G1

Product name	Ordering code	Colour temperature [K]	Current nominal If nom [mA]	Luminous flux ¹ φ [lm]	Useful luminous flux ² [lm]	Voltage ¹ Vf [V]	Power ¹ P [W]	Efficacy ¹ [lm/W]	Current minimum If min ³ [mA]	Current maximum If max [mA]	Energy Efficiency Class
LinLED 280x55mm 2000lm 930 3x11 33V Opt G1	1010 117 95646	3000	450	1914	1972	32	14	134	30	1050	E
LinLED 280x55mm 2000lm 940 3x11 33V Opt G1	1010 117 90346	4000	450	2053	2115	32	14	144	30	1050	D

¹At nominal current and T_p

²At nominal current and 25°C

³It is recommended not to operate below minimum current in order to avoid un-even brightness

Tolerance range for optical and electrical ±10%

Linear LED modules 3-Row

Temperature & humidity

Specification item	Unit	Value
Tp	[°C]	45
Tp rated	[°C]	65
Tc	[°C]	85
Relative humidity (non-condensing)	[%]	5 ... 85
Storage ambient temperature	[°C]	-25 ... +85
Storage relative humidity (non-condensing)	[%]	5 ... 85

Tp - Temperature related to the performance parameters of the LED modules

Tp rated - Maximum operating temperature to which the rated performance characteristics are declared

Tc - Highest permissible value for safe operation

Technical data

Specification item	Unit	Value
Classification acc. to IEC 62031		built-in
Working voltage	[Vdc]	350
Beam angle	[deg]	120
Initial color coordinates		Acc. to CIE 1931
Photobiological safety		RG1 unlimited

Color coordinates

According to CIE 1931

Specification item	CIEx	CIEy
2700K	0.4578	0.4101
3000K	0.4338	0.4030
4000K	0.3818	0.3797
6500K	0.3123	0.3282

Certificates & standards

Specification item	Compliant
ENEC	Yes
CE	Yes
RoHS	Yes
REACH	Yes
IP rating	No IP rating

Linear LED modules 3-Row

Lumen maintenance

LinLED CRI 80

for LinLED CRI 80 Optimum G2

Forward current	Tp temp.	L70 [h]		L80 [h]		L90 [h]	
		B50	B10	B50	B10	B50	B10
If nom	45°C	>100 000	>100 000	>100 000	>100 000	72 000	62 000
	55°C	>100 000	>100 000	>100 000	>100 000	72 000	62 000
	65°C	>100 000	>100 000	>100 000	>100 000	70 000	61 000
	75°C	>100 000	>100 000	>100 000	>100 000	69 000	60 000
	85°C	>100 000	>100 000	>100 000	>100 000	68 000	60 000
If max	45°C	>100 000	>100 000	>100 000	>100 000	51 000	39 000
	55°C	>100 000	>100 000	>100 000	>100 000	51 000	39 000
	65°C	>100 000	>100 000	>100 000	>100 000	48 000	37 000
	75°C	>100 000	>100 000	>100 000	>100 000	45 000	35 000
	85°C	>100 000	>100 000	>100 000	>100 000	69 000	43 000

calculated data based on LM80 LED data (@65mA 17000h / @160mA & 200mA 12000h)

LinLED CRI 80

for LinLED CRI 90 Optimum G2

Forward current	Tp temp.	L70 [h]		L80 [h]		L90 [h]	
		B50	B10	B50	B10	B50	B10
If nom	45°C	>100 000	>100 000	>100 000	>100 000	70 000	59 000
	55°C	>100 000	>100 000	>100 000	>100 000	70 000	59 000
	65°C	>100 000	>100 000	>100 000	>100 000	68 000	58 000
	75°C	>100 000	>100 000	>100 000	>100 000	66 000	57 000
	85°C	>100 000	>100 000	>100 000	>100 000	65 000	57 000
If max	45°C	>100 000	>100 000	>100 000	>100 000	51 000	39 000
	55°C	>100 000	>100 000	>100 000	>100 000	51 000	39 000
	65°C	>100 000	>100 000	>100 000	>100 000	48 000	37 000
	75°C	>100 000	>100 000	>100 000	>100 000	45 000	35 000
	85°C	>100 000	>100 000	>100 000	>100 000	69 000	43 000

calculated data based on LM80 LED data (@65mA 17000h / @160mA & 200mA 12000h)

LinLED CRI 80

for LinLED CRI 80 Optimum G1 & CRI 90 Optimum G1

Forward current	Tp temp.	L70 [h]		L80 [h]		L90 [h]	
		B50	B10	B50	B10	B50	B10
If nom	45°C	>100 000	>100 000	>100 000	>100 000	>100 000	>100 000
	55°C	>100 000	>100 000	>100 000	>100 000	>100 000	>100 000
	65°C	>100 000	>100 000	>100 000	>100 000	>100 000	>100 000
If max	45°C	>100 000	>100 000	>100 000	>100 000	>100 000	50 000
	55°C	>100 000	>100 000	>100 000	>100 000	>100 000	45 000
	65°C	>100 000	>100 000	>100 000	>100 000	52 000	42 000

calculated data based on LM80 LED data 9 000h


LinLED CRI 80

for LinLED CRI 80 G5

Forward current	Tp temp.	L70 [h]		L80 [h]		L90 [h]	
		B50	B10	B50	B10	B50	B10
If nom	45°C	>102 000	>102 000	>102 000	>102 000	>102 000	>102 000
	55°C	>102 000	>102 000	>102 000	>102 000	>102 000	>102 000
	65°C	>102 000	>102 000	>102 000	>102 000	87 000	86 000
If max	75°C	>102 000	>102 000	>102 000	>102 000	74 000	73 000
	85°C	>102 000	>102 000	>102 000	>102 000	63 000	62 000
	45°C	>102 000	>102 000	>102 000	>102 000	>102 000	>102 000
	55°C	>102 000	>102 000	>102 000	>102 000	90 000	89 000
	65°C	>102 000	>102 000	>102 000	>102 000	77 000	76 000
	75°C	>102 000	>102 000	>102 000	>102 000	65 000	64 000
	85°C	>102 000	>102 000	>102 000	>102 000	55 000	54 000

Reported data based on LM80 LED data 12000h

Dimensions

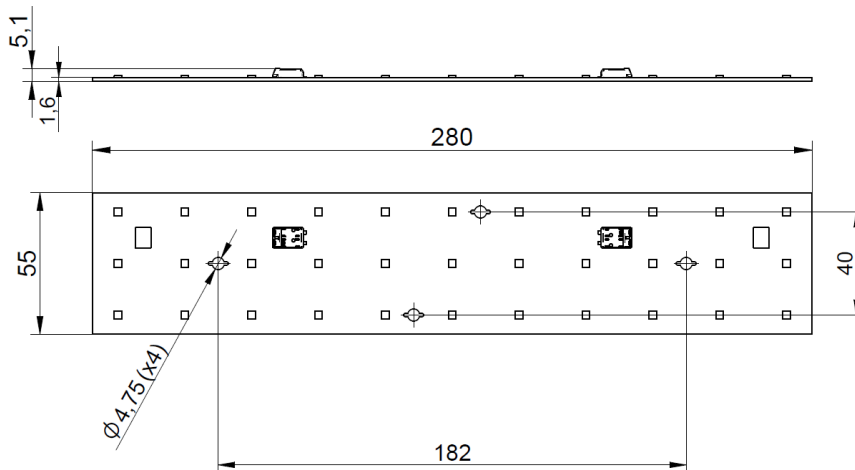

Mounting


LED Modules cannot be exposed to tensile or compressive stresses. For this purpose it is necessary that the modules are assembled to a flat surface by only rounded head screws. Additionally plastic flat washer should be used to ensure creepeage distance between screw's head and surface of the pcb. Max. torque for fixing: 0,5Nm.

LED modules are sensitive to electrostatic discharge (ESD). Follow safety regulations according to IEC 61340-5-1.

Linear LED modules 3-Row

Wiring

Wire cross section and strip length:



D - wire cross section (solid and flexible wires)	Min	Max
	0.2mm ²	0.75mm ²
	AWG 24	AWG 18

L - strip length	Min	Max
	8mm	9mm


Opening for the release of wires from the top with release pin Electroterminal art. 881 167 884:




Connections

Max number of modules	Unit	Series	Parallel
LinLED 280x55mm ... 33V ...	[pcs]	10	6

Wiring for series connection system

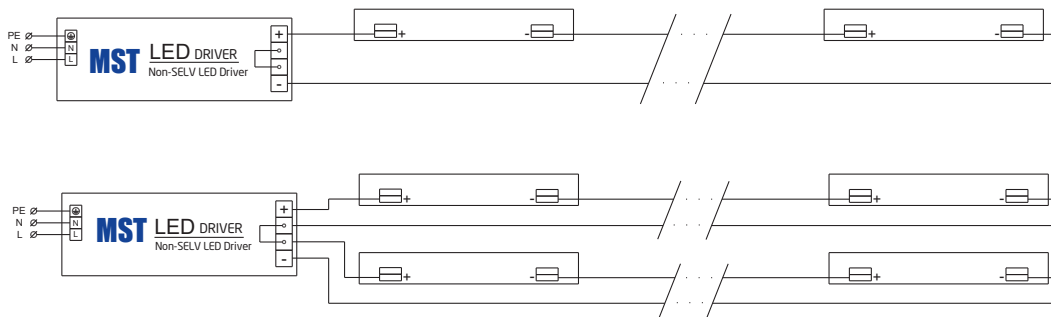

Wiring for parallel connection system

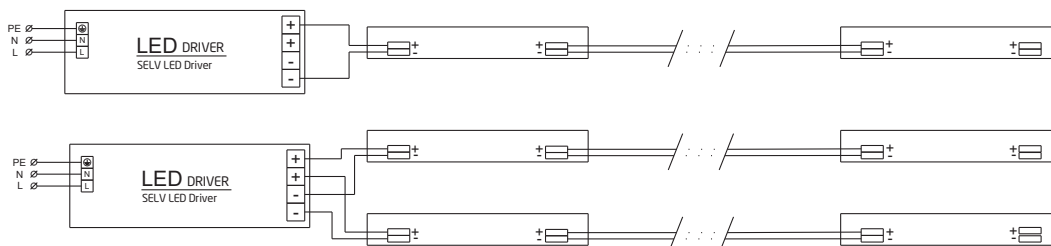

To prevent irregular luminous intensity in parallel connection use only LED modules from the same V-code group.
V-code (e.g. "A", "B", "AB") is printed on the LED module and box label. Naming is not adequate to efficacy or luminous flux.

Linear LED modules 3-Row

Energy Label / EPREL database

To obtain Energy Label for this product visit <https://eprel.ec.europa.eu/> and enter model identifier

Model identifier consists of 10 digits XXXX XXX XXX. It is printed directly on the LED module or on product label. This is the number you can see in EPREL database.

Ordering code consist of 12 digits XXXX XXX XXX46. Additional last two digits means packaging of the product.

Mounting

LED Modules cannot be exposed to tensile or compressive stresses. For this purpose it is necessary that the modules are assembled to a flat surface by only rounded head screws. Additionally plastic flat washer should be used to ensure creepeage distance between screw's head and surface of the pcb. Max. torque for fixing: 0,5Nm.

LED modules are sensitive to electrostatic discharge (ESD). Follow safety regulations according to IEC 61340-5-1.

Ordering codes

Product name	Ordering code	Pieces per box	Pieces per pallet	Box dimensions [mm]
LinLED 280x55mm 1100lm 830 3x11 33V CG G5	1010 137 01546	60	7200	300 x 266 x 83
LinLED 280x55mm 1100lm 840 3x11 33V CG G5	1010 137 01646	60	7200	300 x 266 x 83
LinLED 280x55mm 1100lm 830 3x11 33V Opt G2	1010 117 82246	60	7200	300 x 266 x 83
LinLED 280x55mm 1100lm 840 3x11 33V Opt G2	1010 117 82346	60	7200	300 x 266 x 83
LinLED 280x55mm 1100lm 927 3x11 33V Opt G2	1010 127 08446	60	7200	300 x 266 x 83
LinLED 280x55mm 1100lm 930 3x11 33V Opt G2	1010 127 08546	60	7200	300 x 266 x 83
LinLED 280x55mm 1100lm 940 3x11 33V Opt G2	1010 127 08646	60	7200	300 x 266 x 83
LinLED 280x55mm 2000lm 830 3x11 33V Opt G1	1010 117 54846	60	7200	300 x 266 x 83
LinLED 280x55mm 2000lm 840 3x11 33V Opt G1	1010 117 54946	60	7200	300 x 266 x 83
LinLED 280x55mm 2000lm 930 3x11 33V Opt G1	1010 117 95646	60	7200	300 x 266 x 83
LinLED 280x55mm 2000lm 940 3x11 33V Opt G1	1010 117 90346	60	7200	300 x 266 x 83