


Linear LED modules 2000lm/1ft 4C

Product description

- Long life-time
- Built-in, constant current LED module
- Re-workable push-in terminals enabling easy connection
- Compliance and approval: CE
- 4C - four connectors for parallel system, also recognized as a low voltage system - SELV
- Available CCT from 2700K to 6500K and CRI 80, 90

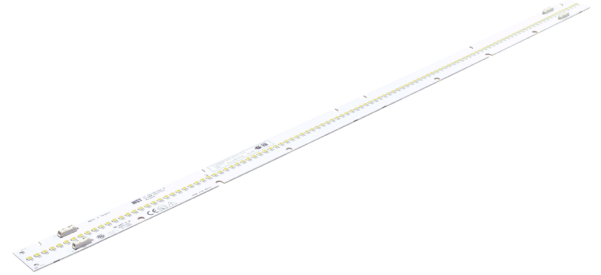

LinLED CRI 80 Optimum G3

Product name	Ordering code	Colour temperature [K]	Current nominal If nom [mA]	Luminous flux* φ [lm]	Voltage* Vf [V]	Power* P [W]	Efficacy* [lm/W]	Current maximum If max [mA]
LinLED 280x24mm 2000lm 830 4C 42V Opt G3	1010 117 84946	3000	290	1942	38	11	175	600
LinLED 560x24mm 4000lm 830 4C 42V Opt G3	1010 117 85046		580	3884	38	22	175	1200
LinLED 280x24mm 2000lm 840 4C 42V Opt G3	1010 117 85146	4000	290	2104	38	11	189	600
LinLED 560x24mm 4000lm 840 4C 42V Opt G3	1010 117 85246		580	4208	38	22	189	1200

LinLED CRI 80 Optimum G2

Product name	Ordering code	Colour temperature [K]	Current nominal If nom [mA]	Luminous flux* φ [lm]	Voltage* Vf [V]	Power* P [W]	Efficacy* [lm/W]	Current maximum If max [mA]
LinLED 280x24mm 2000lm 830 4C 42V Opt G2	1010 117 32846	3000	280	1846	40	11	166	600
LinLED 560x24mm 4000lm 830 4C 42V Opt G2	1010 117 33446		560	3691	40	22	166	1200
LinLED 280x24mm 2000lm 840 4C 42V Opt G2	1010 117 32946	4000	280	1940	40	11	175	600
LinLED 560x24mm 4000lm 840 4C 42V Opt G2	1010 117 33546		560	3880	40	22	175	1200

LinLED CRI 90 Optimum G2

Product name	Ordering code	Colour temperature [K]	Current nominal If nom [mA]	Luminous flux* φ [lm]	Voltage* Vf [V]	Power* P [W]	Efficacy* [lm/W]	Current maximum If max [mA]
LinLED 280x24mm 2000lm 927 4C 42V Opt G2	1010 117 70146	2700	330	1745	41	13	130	600
LinLED 560x24mm 4000lm 927 4C 42V Opt G2	1010 117 70246		660	3490	41	27	130	1200
LinLED 280x24mm 2000lm 930 4C 42V Opt G2	1010 117 40346	3000	330	1874	41	13	140	600
LinLED 560x24mm 4000lm 930 4C 42V Opt G2	1010 117 40946		660	3748	41	27	140	1200
LinLED 280x24mm 2000lm 940 4C 42V Opt G2	1010 117 40446	4000	330	2003	41	13	149	600
LinLED 560x24mm 4000lm 940 4C 42V Opt G2	1010 117 41046		660	4007	41	27	149	1200

LinLED CRI 80 Basic G1

Product name	Ordering code	Colour temperature [K]	Current nominal If nom [mA]	Luminous flux* φ [lm]	Voltage* Vf [V]	Power* P [W]	Efficacy* [lm/W]	Current maximum If max [mA]
LinLED 280x24mm 2000lm 830 4C 42V Bsc G1	1010 117 38246	3000	335	1926	40	13	144	600
LinLED 560x24mm 4000lm 830 4C 42V Bsc G1	1010 117 38846		670	3852	40	27	144	1200
LinLED 280x24mm 2000lm 840 4C 42V Bsc G1	1010 117 38346	4000	335	2025	40	13	151	600
LinLED 560x24mm 4000lm 840 4C 42V Bsc G1	1010 117 38946		670	4049	40	27	151	1200

*At nominal current and Tj
Tolerance range for optical and electrical ±10%

Linear LED modules 2000lm/1ft 4C

Temperature & humidity

Specification item	Unit	Value
Tp	[°C]	45
Tp rated	[°C]	65
Tc	[°C]	85
Relative humidity (non-condensing)	[%]	5 ... 85
Storage ambient temperature	[°C]	-25 ... +85
Storage relative humidity (non-condensing)	[%]	5 ... 85

Tp - Temperature related to the performance parameters of the LED modules
Tp rated - Maximum operating temperature to which the rated performance characteristics are declared
Tc - Highest permissible value for safe operation

Technical data

Specification item	Unit	Value
Classification acc. to IEC 62031		built-in
Energy Efficiency Class		A++
Working voltage	[Vdc]	60
Beam angle	[deg]	120
Initial color consistency	[SDCM]	3
Initial color coordinates		Acc. to CIE 1931
Photobiological safety		RG1 unlimited

Certificates & standards

Specification item	Compliant
ENEC	No
CE	Yes
RoHS	Yes
REACH	Yes
Zhaga	Comply with Book 7
IP rating	No IP rating

Lumen maintenance

LinLED CRI 80

for LinLED CRI 80 Optimum G2

Forward current	Tp temp.	L70 [h]		L80 [h]		L90 [h]	
		B50	B10	B50	B10	B50	B10
If nom	45°C	>72 000	>72 000	>72 000	>72 000	71 000	61 000
	55°C	>72 000	>72 000	>72 000	>72 000	71 000	61 000
	65°C	>72 000	>72 000	>72 000	>72 000	69 000	60 000
	75°C	>72 000	>72 000	>72 000	>72 000	68 000	59 000
	85°C	>72 000	>72 000	>72 000	>72 000	67 000	58 000
If max	45°C	>72 000	>72 000	>72 000	>72 000	51 000	39 000
	55°C	>72 000	>72 000	>72 000	>72 000	51 000	39 000
	65°C	>72 000	>72 000	>72 000	>72 000	48 000	37 000
	75°C	>72 000	>72 000	>72 000	>72 000	45 000	35 000
	85°C	>72 000	>72 000	>72 000	>72 000	69 000	43 000

reported data based on LM80 LED data (@65mA 17000h / @160mA & 200mA 12000h)

LinLED CRI 80

for LinLED CRI 80 Basic G1

Forward current	Tp temp.	L70 [h]		L80 [h]		L90 [h]	
		B50	B10	B50	B10	B50	B10
If nom	45°C	>72 000	>72 000	>72 000	>72 000	67 000	57 000
	55°C	>72 000	>72 000	>72 000	>72 000	67 000	57 000
	65°C	>72 000	>72 000	>72 000	>72 000	65 000	56 000
	75°C	>72 000	>72 000	>72 000	>72 000	64 000	54 000
	85°C	>72 000	>72 000	>72 000	>72 000	62 000	54 000
If max	45°C	>72 000	>72 000	>72 000	>72 000	51 000	39 000
	55°C	>72 000	>72 000	>72 000	>72 000	51 000	39 000
	65°C	>72 000	>72 000	>72 000	>72 000	48 000	37 000
	75°C	>72 000	>72 000	>72 000	>72 000	45 000	35 000
	85°C	>72 000	>72 000	>72 000	>72 000	69 000	43 000

reported data based on LM80 LED data (@65mA 17000h / @160mA & 200mA 12000h)

LinLED CRI 80

for LinLED CRI 80 Optimum G3

Forward current	Tp temp.	L70 [h]		L80 [h]		L90 [h]	
		B50	B10	B50	B10	B50	B10
If nom	45°C	>60 000	>60 000	>60 000	>60 000	44 000	39 000
	65°C	>60 000	>60 000	>60 000	>60 000	34 000	29 000
	85°C	>60 000	>60 000	>60 000	>60 000	29 000	25 000
If max	45°C	>60 000	>60 000	>60 000	>60 000	40 000	32 000
	65°C	>60 000	>60 000	>60 000	>60 000	30 000	27 000
	85°C	>60 000	>60 000	>60 000	55 000	25 000	25 000

reported data based on LM80 LED data 10 000h

LinLED CRI 90

for LinLED CRI 90 Optimum G2


Forward current	Tp temp.	L70 [h]		L80 [h]		L90 [h]	
		B50	B10	B50	B10	B50	B10
If nom	45°C	>60 000	>60 000	>60 000	>60 000	>60 000	57 000
	55°C	>60 000	>60 000	>60 000	>60 000	48 000	47 000
	65°C	>60 000	>60 000	>60 000	>60 000	38 000	34 000
If max	45°C	>60 000	>60 000	52 000	49 000	29 000	28 000
	55°C	>60 000	>60 000	47 000	44 000	25 000	24 000
	65°C	>60 000	58 000	41 000	38 000	22 000	19 000

reported data based on LM80 LED data 10 000h


Linear LED modules 2000lm/1ft 4C

Dimensions

LinLED 280x24mm

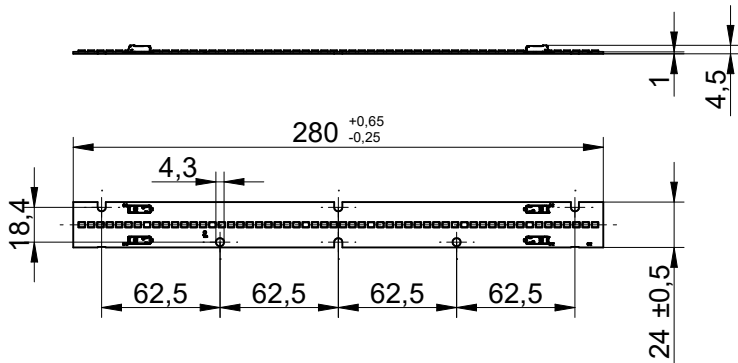

LinLED 560x24mm

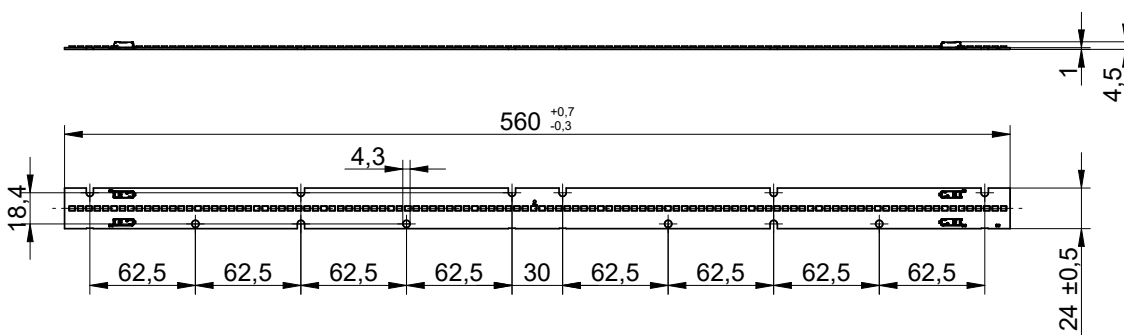


Mounting

LED Modules cannot be exposed to tensile or compressive stresses. For this purpose it is necessary that the modules are assembled to a flat surface by only rounded head screws. Additionally plastic flat washer should be used to ensure creepage distance between screw's head and surface of the pcb. Max. torque for fixing: 0,5Nm.

LED modules are sensitive to electrostatic discharge (ESD). Follow safety regulations according to IEC 61340-5-1.

Wiring

Wire cross section and strip length:



D - wire cross section (solid and flexible wires)	Min	Max
	0.2mm ²	0.75mm ²
	AWG 24	AWG 18

L - strip length	Min	Max
	8mm	9mm

Opening for the release of wires from the top with release pin Electroterminal art. 881 167 884:




Linear LED modules 2000lm/1ft 4C

Connections

Max number of modules	Unit	Series	Parallel
LinLED 280x20mm	[pcs]	-	8
LinLED 560x20mm	[pcs]	-	4

Wiring for parallel connection system (4C)

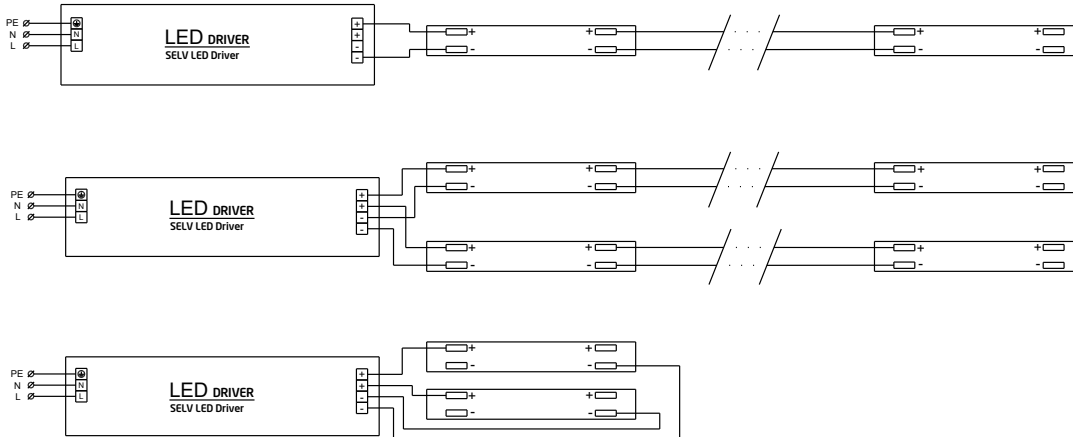

To prevent irregular luminous intensity in parallel connection use only LED modules from the same V-code group. V-code (e.g. *A*, *B*, *AB*) is printed on the LED module and box label. Naming is not adequate to efficacy or luminous flux.

Ordering codes

Product name	Ordering code	Pieces per box	Pieces per pallet	Box dimensions [mm]
LinLED 280x24mm 2000lm 830 4C 42V Opt G3	1010 117 84946	187	20196	298 x 238 x 88
LinLED 560x24mm 4000lm 830 4C 42V Opt G3	1010 117 85046	154	8624	594 x 303 x 58
LinLED 280x24mm 2000lm 840 4C 42V Opt G3	1010 117 85146	187	20196	298 x 238 x 88
LinLED 560x24mm 4000lm 840 4C 42V Opt G3	1010 117 85246	154	8624	594 x 303 x 58
LinLED 280x24mm 2000lm 830 4C 42V Opt G2	1010 117 32846	187	20196	298 x 238 x 88
LinLED 560x24mm 4000lm 830 4C 42V Opt G2	1010 117 33446	154	8624	594 x 303 x 58
LinLED 280x24mm 2000lm 840 4C 42V Opt G2	1010 117 32946	187	20196	298 x 238 x 88
LinLED 560x24mm 4000lm 840 4C 42V Opt G2	1010 117 33546	154	8624	594 x 303 x 58
LinLED 280x24mm 2000lm 927 4C 42V Opt G2	1010 117 70146	187	20196	298 x 238 x 88
LinLED 560x24mm 4000lm 927 4C 42V Opt G2	1010 117 70246	154	8624	594 x 303 x 58
LinLED 280x24mm 2000lm 930 4C 42V Opt G2	1010 117 40346	187	20196	298 x 238 x 88
LinLED 560x24mm 4000lm 930 4C 42V Opt G2	1010 117 40946	154	8624	594 x 303 x 58
LinLED 280x24mm 2000lm 940 4C 42V Opt G2	1010 117 40446	187	20196	298 x 238 x 88
LinLED 560x24mm 4000lm 940 4C 42V Opt G2	1010 117 41046	154	8624	594 x 303 x 58
LinLED 280x24mm 2000lm 830 4C 42V Bsc G1	1010 117 38246	187	20196	298 x 238 x 88
LinLED 560x24mm 4000lm 830 4C 42V Bsc G1	1010 117 38846	154	8624	594 x 303 x 58
LinLED 280x24mm 2000lm 840 4C 42V Bsc G1	1010 117 38346	187	20196	298 x 238 x 88
LinLED 560x24mm 4000lm 840 4C 42V Bsc G1	1010 117 38946	154	8624	594 x 303 x 58