


Rectangular LED modules 510x255mm

Product description

- Long life-time
- Built-in, constant current LED module
- Re-workable push-in terminals enabling easy connection
- Series or parallel connection system
- Compliance and approval: CE, ENEC
- Available CCT from 2200K to 6500K and CRI 80

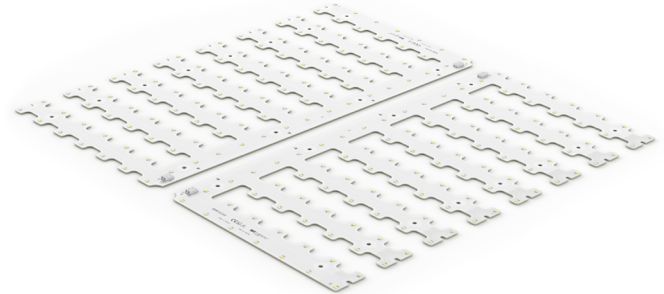

RecLED CRI 80 Optimum G2

Product name	Ordering code	Colour temperature [K]	Current nominal If nom [mA]	Luminous flux ¹ φ [lm]	Useful luminous flux ² [lm]	Voltage ¹ Vf [V]	Power ¹ P [W]	Efficacy ¹ [lm/W]	Current minimum If min ³ [mA]	Current maximum If max [mA]	Energy Efficiency Class
RecLED 510x255mm 2500lm 830 42V Opt G2	1010 127 87846	3000	350	2379	2470	38	13	178	80	1200	C
RecLED 510x255mm 2500lm 840 42V Opt G2	1010 127 87946	4000	350	2496	2590	38	13	187	80	1200	C
RecLED 510x255mm 2500lm 850 42V Opt G2	1010 127 92346	5000	350	2496	2590	38	13	187	80	1200	C
RecLED 510x255mm 2500lm 865 42V Opt G2	1010 127 92446	6500	350	2496	2590	38	13	187	80	1200	C

¹At nominal current and T_p

²At nominal current and 25°C

³It is recommended not to operate below minimum current in order to avoid un-even brightness

Tolerance range for optical and electrical ±10%

Temperature & humidity

Specification item	Unit	Value
T _p	[°C]	45
T _p rated	[°C]	65
T _c	[°C]	85
Relative humidity (non-condensing)	[%]	5 ... 85
Storage ambient temperature	[°C]	-25 ... +85
Storage relative humidity (non-condensing)	[%]	5 ... 85

T_p - Temperature related to the performance parameters of the LED modules

T_p rated - Maximum operating temperature to which the rated performance characteristics are declared

T_c - Highest permissible value for safe operation

Technical data

Specification item	Unit	Value
Classification acc. to IEC 62031		built-in
Working voltage	[Vdc]	350
Beam angle	[deg]	120
Initial color consistency	[SDCM]	3
Photobiological safety		RG1 unlimited

Rectangular LED modules 510x255mm

Color coordinates

According to CIE 1931

Specification item	CIE _x	CIE _y
2700K	0.4578	0.4101
3000K	0.4338	0.4030
4000K	0.3818	0.3797
5000K	0.3447	0.3553
6500K	0.3123	0.3282

Certificates & standards

Specification item	Compliant
ENEC	Yes
CE	Yes
RoHS	Yes
REACH	Yes
Zhaga	No
IP rating	No IP rating


Lumen maintenance

ReclED CRI 80

Forward current	T _p temp.	L70 [h]	L80 [h]	L90 [h]
If max	85°C	>102 000	>102 000	53 000

reported data based on LM80 LED data 17 000h


Dimensions

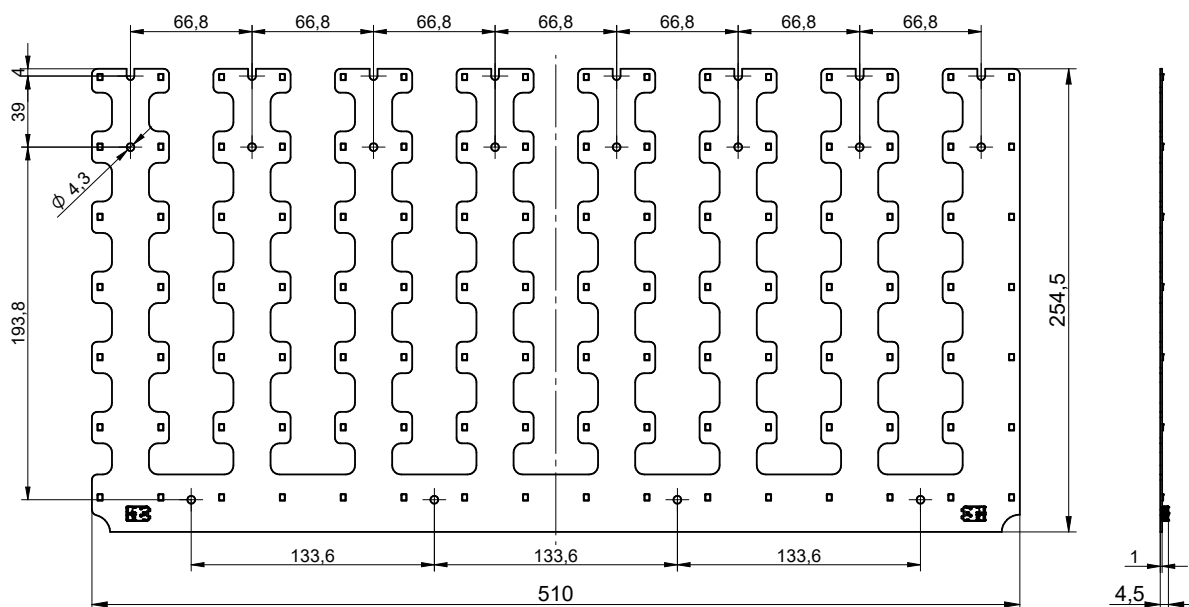

Rectangular LED modules 510x255mm

Wiring

Wire cross section and strip length:



D - wire cross section (solid and flexible wires)	Min	Max
	0.2mm ²	0.75mm ²
	AWG 24	AWG 18


L - strip length	Min	Max
	8mm	9mm

Opening for the release of wires from the top
with release pin Electroterminal art. 881 167 884:




Connections

Wiring for series connection system

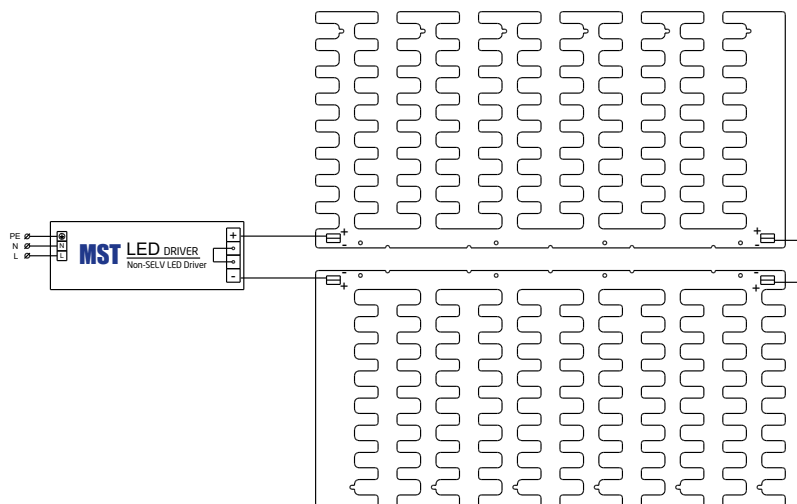

Wiring for parallel connection system

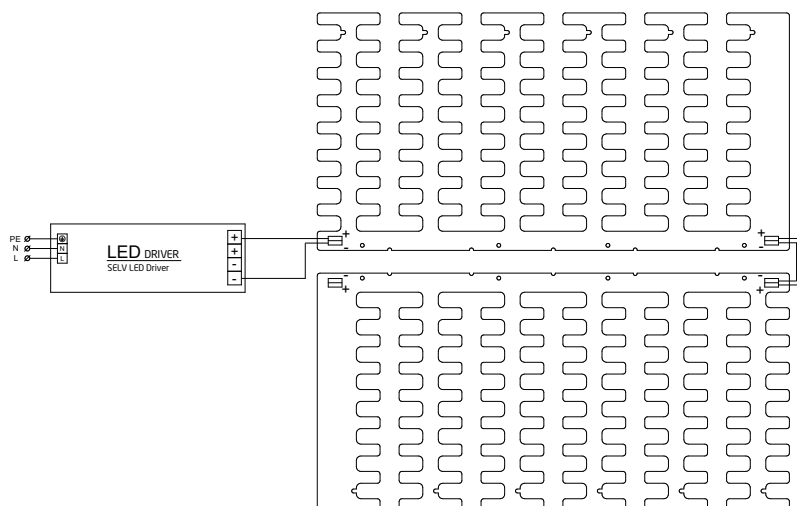

To prevent irregular luminous intensity in parallel connection use only LED modules from the same V-code group.
V-code (e.g. "A", "B", "AB") is printed on the LED module and box label. Naming is not adequate to efficacy or luminous flux.

Rectangular LED modules 510x255mm

Energy Label / EPREL database

To obtain Energy Label for this product visit <https://eprel.ec.europa.eu/> and enter model identifier

Model identifier consists of 10 digits XXXX XXX XXX. It is printed directly on the LED module or on product label. This is the number you can see in EPREL database.

Ordering code consist of 12 digits XXXX XXX XXX46. Additional last two digits means packaging of the product.

Ordering codes

Product name	Ordering code	Pieces per box	Pieces per pallet	Box dimensions [mm]
RecLED 510x255mm 2500lm 830 42V Opt G2	1010 127 87846	16	960	603 x 266 x 83
RecLED 510x255mm 2500lm 840 42V Opt G2	1010 127 87946	16	960	603 x 266 x 83
RecLED 510x255mm 2500lm 850 42V Opt G2	1010 127 92346	16	960	603 x 266 x 83
RecLED 510x255mm 2500lm 865 42V Opt G2	1010 127 92446	16	960	603 x 266 x 83